

Ambienti

AKF 8C

8" 2-way In-Ceiling / Wall Loudspeaker

Frequency Response: 35Hz - 21kHz $\pm$ 3 dB
Power Handling: 60 watts nom. 120 max.
Sensitivity: 91dB 1 watt / 1 meter
Impedance: 8 ohms nominal
Tweeter: 1" Teton® soft dome pivoting
Cut-Out Dimensions: 8-5/8" dia. x 3-7/8" deep
Overall Dimensions: 9-7/8" diameter

AKF 6.5C

6-1/2" 2-way In-Ceiling / Wall Loudspeaker

Frequency Response: 42Hz - 21kHz $\pm$ 3 dB
Power Handling: 50 watts nom. 100 max.
Sensitivity: 90dB 1 watt / 1 meter
Impedance: 8 ohms nominal
Tweeter: 1" Teton® soft dome pivoting
Cut-Out Dimensions: 7-1/4" dia. x 3-9/16" deep
Overall Dimensions: 8-7/16" diameter



Rear View



Side View

Optional Square Frameless Grilles

GRF8 SQ
for AKF 8C


GRF6 SQ
for AKF 6.5C




Features:

- Woven woofers made from genuine DuPont™ Kevlar®
- Baffle mounted mid & high frequency EQ switches
- Magnetic, frameless, vibration-free, all-weather grille
- High-grade crossovers with polyswitch overdrive protection
- Sold and shipped in pairs

Optional Pre-Construction Brackets & Vapor Domes

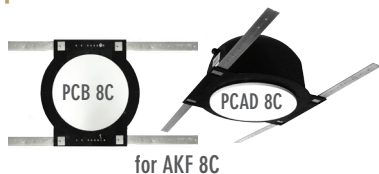

for AKF 8C

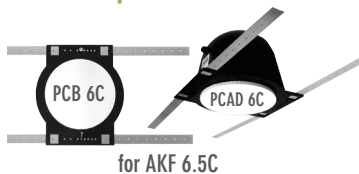

for AKF 6.5C



Limited
LIFETIME
Warranty



Angstrom
LOUDSPEAKERS

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company



Rev. A

Angstrom Loudspeakers MC

391 Marwood Drive, Unit 6, Oshawa, Ontario L1H 7P8 • TEL: 416-988-8806

www.AngstromLoudspeakers.com

View all
of our
Models:

