

INDF Series

Frameless Design with Magnetically-Attached Grille

INDF 6.5C

6-1/2" 2-way In-Ceiling / Wall Loudspeaker

Frequency Response: 45Hz - 20Hz $\pm$ 3 dB

Power Handling: 40 watts nominal 90 max

Sensitivity: 91dB 1 watt / 1 meter

Impedance: 8 ohms nominal

Tweeter: 1" Soft dome pivoting tweeter

Cut-out dimensions: 7-1/4" x 2-7/8" deep

Overall dimensions: 8-7/16" diameter

Sold in pairs

INDF 8C

8" 2-way In-Ceiling / Wall Loudspeaker

Frequency Response: 35Hz - 20kHz $\pm$ 3 dB

Power Handling: 50 watts nominal 110 max

Sensitivity: 91dB 1 watt / 1 meter

Impedance: 8 ohms nominal

Tweeter: 1" Soft dome pivoting tweeter


Cut-out dimensions: 8-5/8" x 3-7/8" deep

Overall dimensions: 9-7/8" diameter

Sold in pairs

Features:

- Poly woofers with butyl rubber surrounds
- Frameless fine mesh grilles
- Load balancing toggle mounting system
- All weather pain-able Slim Grille to match mounting surface

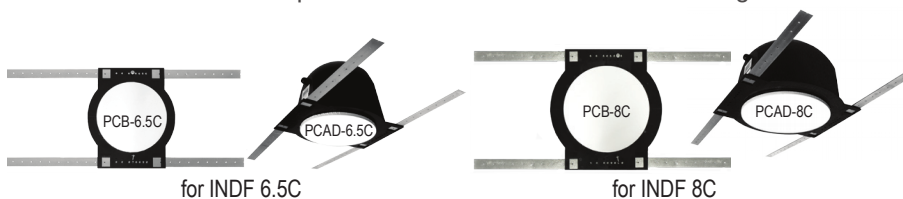

for INDF 6.5C

for INDF 8C

Optional Pre-Construction Brackets & Vapor Domes



Optional Square Frameless Grilles

GRF-6SQ
for INDF 6.5C

GRF-8SQ
for INDF 8C



ANGSTROM LOUDSPEAKERS MC

391 Marwood Drive, Unit 6,
Oshawa, ON L1H 7P8

Tel: 416-988-8806

www.angstromloudspeakers.com

View
all our
Models

